



LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

Advanced Compton scattering light source R&D at LLNL

F. Albert, S. G. Anderson, G. Anderson, A. Bayramian,
S. M. Betts, T. S. Chu, D. J. Gibson, R. A. Marsh, M.
Messerly, M. Y. Shverdin, S. Wu, F. V. Hartemann, C.
W. Siders, C. P. J. Barty

August 19, 2010

Ultrafast Phenomena Conference
Snowmass Village, CO, United States
July 18, 2010 through July 23, 2010

Disclaimer

This document was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor Lawrence Livermore National Security, LLC, nor any of their employees makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or Lawrence Livermore National Security, LLC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or Lawrence Livermore National Security, LLC, and shall not be used for advertising or product endorsement purposes.

Advanced Compton scattering light source R&D at LLNL

F. Albert, S.G. Anderson, G. Anderson, A. Baraymian, S.M. Betts, T.S. Chu, D.J. Gibson, R.A. Marsh, M. Messerly, M.Y. Shverdin, S. Wu, F.V. Hartemann, C.W. Siders and C.P.J. Barty

¹ Lawrence Livermore National Laboratory
E-mail: albert6@llnl.gov

INTRODUCTION. At MeV photon energies relevant for nuclear processes, Compton scattering light sources are attractive because of their relative compactness and improved brightness above 100 keV, compared to typical synchrotrons. Recent progress in accelerator physics and laser technology have enabled the development of a new class of tunable Mono-Energetic Gamma-Ray (MEGa-Ray) light sources based on Compton scattering between a high-brightness, relativistic electron beam and a high intensity laser pulse produced via chirped-pulse amplification (CPA). A new precision, tunable gamma-ray source driven by a compact, high-gradient X-band linac is currently under development and construction at LLNL. High-brightness, relativistic electron bunches produced by an X-band linac designed in collaboration with SLAC will interact with a Joule-class, 10 ps, diode-pumped CPA laser pulse to generate tunable gamma-rays in the 0.5-2.5 MeV photon energy range via Compton scattering. Based on the success of the previous Thomson-Radiated Extreme X-rays (T-REX) Compton scattering source at LLNL [1, 4, 5], the source will be used to excite nuclear resonance fluorescence lines in various isotopes; applications include homeland security, stockpile science and surveillance, nuclear fuel assay, and waste imaging and assay. After a brief presentation of successful nuclear resonance fluorescence (NRF) experiments done with T-REX, the new source design, key parameters, and current status are presented.

NRF EXPERIMENTS. T-REX experiments have been already performed on an enhanced version of the 100 MeV LLNL electron linac used for previous Compton scattering sources [2]. The electron bunch is accelerated to 120 MeV and focused with a series of quadrupole magnets. The Interaction Laser System (ILS), that produces the photon beam to collide with the electrons, can deliver 750 mJ of energy in 25 ps and 0.2 nm bandwidth at 10 Hz and 1064 nm. The beam after the compressor can then be frequency doubled or tripled using large aperture DKDP crystals. The ILS is focused into a vacuum chamber, at 180° with respect to the electron beam, by a 2.4 m focal length f/50 lens. A complete spectral and spatial characterization of this Compton scattering light source has been made [5]: it produces photons with energies between 0.1 MeV and 0.8 MeV. The T-REX source is described by its key parameters: size (0.01 mm²), divergence (10x6 mrad²), duration (ps), spectrum (15% bandwidth) and intensity (10⁵ photons/shot), all of which are summarized by an on-axis peak brightness of 2.5×10^{15} photons/(s x mm² x mrad² x 0.1%bandwidth) at 0.478 MeV. NRF measurements, a promising method for isotopic imaging, assay, and detection, were performed on ⁷Li using this source [1].

NEW SOURCE DESIGN. The facility hosting the next generation MEGa-ray source is presented in Figure. 1; it includes the new X-band 250 MeV linac, the laser and the control rooms as well as the experimental area.

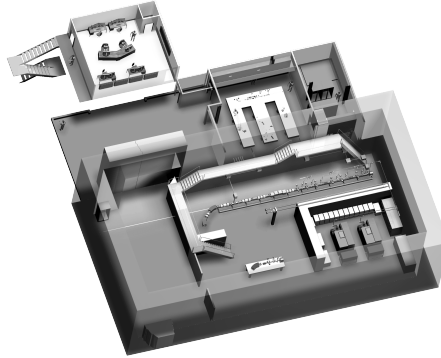


Figure 1: Experimental facility for the next generation 0.5-2.5 MeV MEGa-ray source.

The high brightness electron linac is a key component of the future facility. Design criteria include rf phase and amplitude stability, high-gradient operation at 120 Hz, and low emittance at the interaction point. The emittance-compensated gun design used for this linac is very similar to the X-band rf gun developed by Vlieks and collaborators [3], with improved field balance and mode separation; it will generate 7 MeV photoelectron bunches with 0.25 nC charge and approximately 1.5 mm.mrad normalized emittance after compensation in a solenoid field of 5.5 kG and a drift of 0.75 m. To generate the electrons at the injector photocathode, a 263 nm laser pulse, shaped in time and space to have a uniform cylindrical profile, is used. This pulse is generated from an all-fiber front end, which provides up to 1 mJ, 1053 nm pulses that are frequency quadrupled. Approximately 400 MW of compressed X-band rf power will be available to energize the gun and linac. This power will be produced by 2 XL-4 klystrons, each generating 50 MW, 1.6 μ s pulses at up to 120 Hz repetition rate; a SLED II cavity will then produce 400 MW, 200 ns pulses. Stability of the rf is critical, and begins with the HV modulators; to this end solid-state technology combined with custom transformers is being considered to drive the klystrons. The SLAC designed T53VG3(MC) sections will be used to accelerate the beam up to 250 MV; these sections have demonstrated excellent beam dynamics characteristics, as well as high gradient operation (> 65 MV/m). The linac architecture includes a small chicane to mitigate near-axis halo Bremsstrahlung.

The interaction laser is the other key component of the machine. Stability, robustness, and beam quality are important criteria for the technology choices used in its design. The system uses hyper-dispersion chirped-pulse amplification,

pointing and stabilization feedback loops, a fiber front-end, and beam transport to the interaction region. A 1 J, 120 Hz Injection Laser System (ILS) has been designed to enable photon interaction with nearly all electrons in the accelerator beamline. The ILS provides over 12 x the average power of the original T-REX interaction laser system. The ILS is based upon diode-pumped solid-state laser expertise and technology developed on the Mercury laser project and the Tailored Aperture Ceramic Laser (TACL) at LLNL. Diode pumping is utilized to decrease the thermal load on amplifier slabs, while increasing efficiency and system reliability. The master oscillator power amplifier architecture starts with a 30 μ J stretched pulse from the front end laser system, which is pre-amplified to the 100 mJ level, then image relayed to the four-pass Nd:YAG power amplifier. The ILS power amplifier is a layered Nd:YAG/sapphire composite, which allows aggressive thermal management and parasitic suppression in a single compact slab.

EXPECTED GAMMA-RAY PERFORMANCE. Different benchmarked codes (with T-REX) have been used to predict the gamma-ray output of the new source. In this case, the dose is expected to be 10^9 per shot ; the electron bunch duration 2 ps, the electron beam energy 250 MeV, and its normalized emittance 1.5 mm.mrad. This translates into a peak brightness of order 10^{21} photons/(s x mm² x mrad² x 0.1%bw). More accurate estimates yield projected brightness numbers ranging between 10^{20} and 10^{21} , in the same units. These models use the Compton formula, which includes recoil, and the Lorentz-boosted Klein-Nishina differential scattering cross-section; they also provide estimates of the source linewidth, which is bounded by the laser spectrum and relative energy spread of the electron beam, on the high-frequency side, and by the electron beam emittance in the low-energy tail due to electrons crossing the focus at off-axis angles. Nonlinear spectral broadening effects have also been studied for the design. This very narrow bandwidth will enable the detailed NRF applications outlined in the introduction with this new source.

Acknowledgements. This work performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under Contract DE-AC52-07NA27344.

- 1 F. Albert, et al. Opt. Letters, 35, vol. 3 354-357 (2010).
- 2 F.V. Hartemann, et al., Laser and part. Beams, 22, 221-244 (2004).
- 3 A.E. Vlieks et al., High Energy Density and High Power RF, 6th Workshop, 358 (2003).
- 4 D. J. Gibson, F. Albert, S. G. Anderson, S. M. Betts, M. J. Messerly, H. H. Phan, V. A. Semenov, M. Y. Shverdin, A. M. Tremaine, F. V. Hartemann, C. W. Siders, D. P. McNabb, and C. P. J. Barty, Phys. Rev. ST Accel. Beams 13, 070703 (2010).
- 5 F. Albert, S. G. Anderson, D. J. Gibson, C. A. Hagmann, M. S. Johnson, M. Messerly, V. Semenov, M. Y. Shverdin, B. Rusnak, A. M. Tremaine, F. V. Hartemann, C. W. Siders, D. P. McNabb, and C. P. J. Barty, Phys. Rev. ST accel. beams, 13, 070704 (2010).